
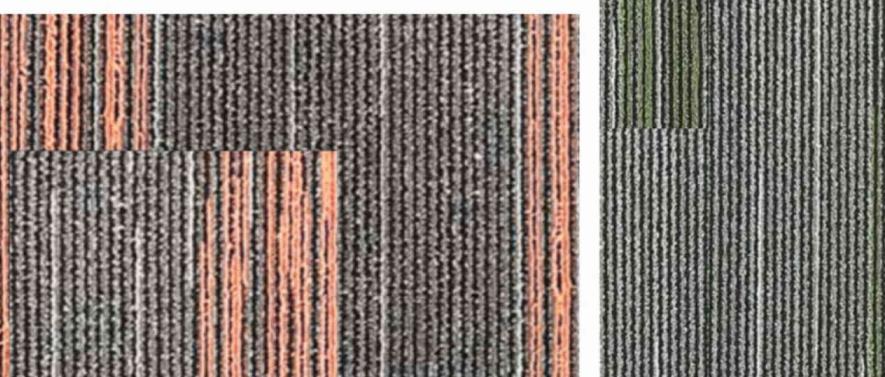


BLOQS

PREMIUM OFFICE
FLOORINGS

CARPET PLANKS 10"x40" - BOX 65sqft

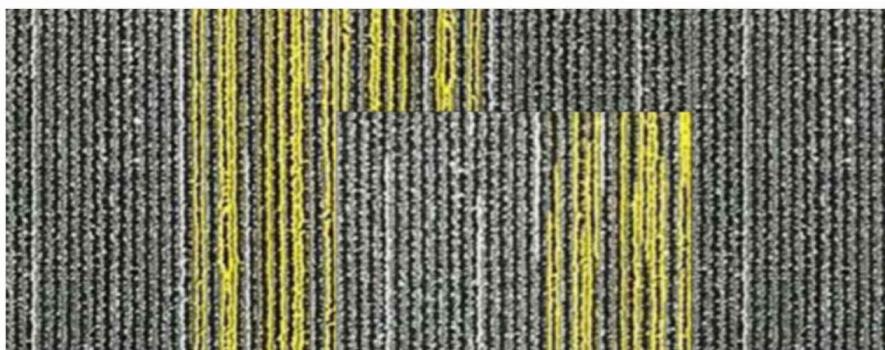

BLOQS

PREMIUM OFFICE
FLOORINGS



10"x40" - 2.75sqft


BLOQS PREMIUM OFFICE
FLOORINGS

WASHINGTON PLANKS - NAVY BLUE

10"x40" - 2.75sqft

BLOQS

PREMIUM OFFICE
FLOORINGS

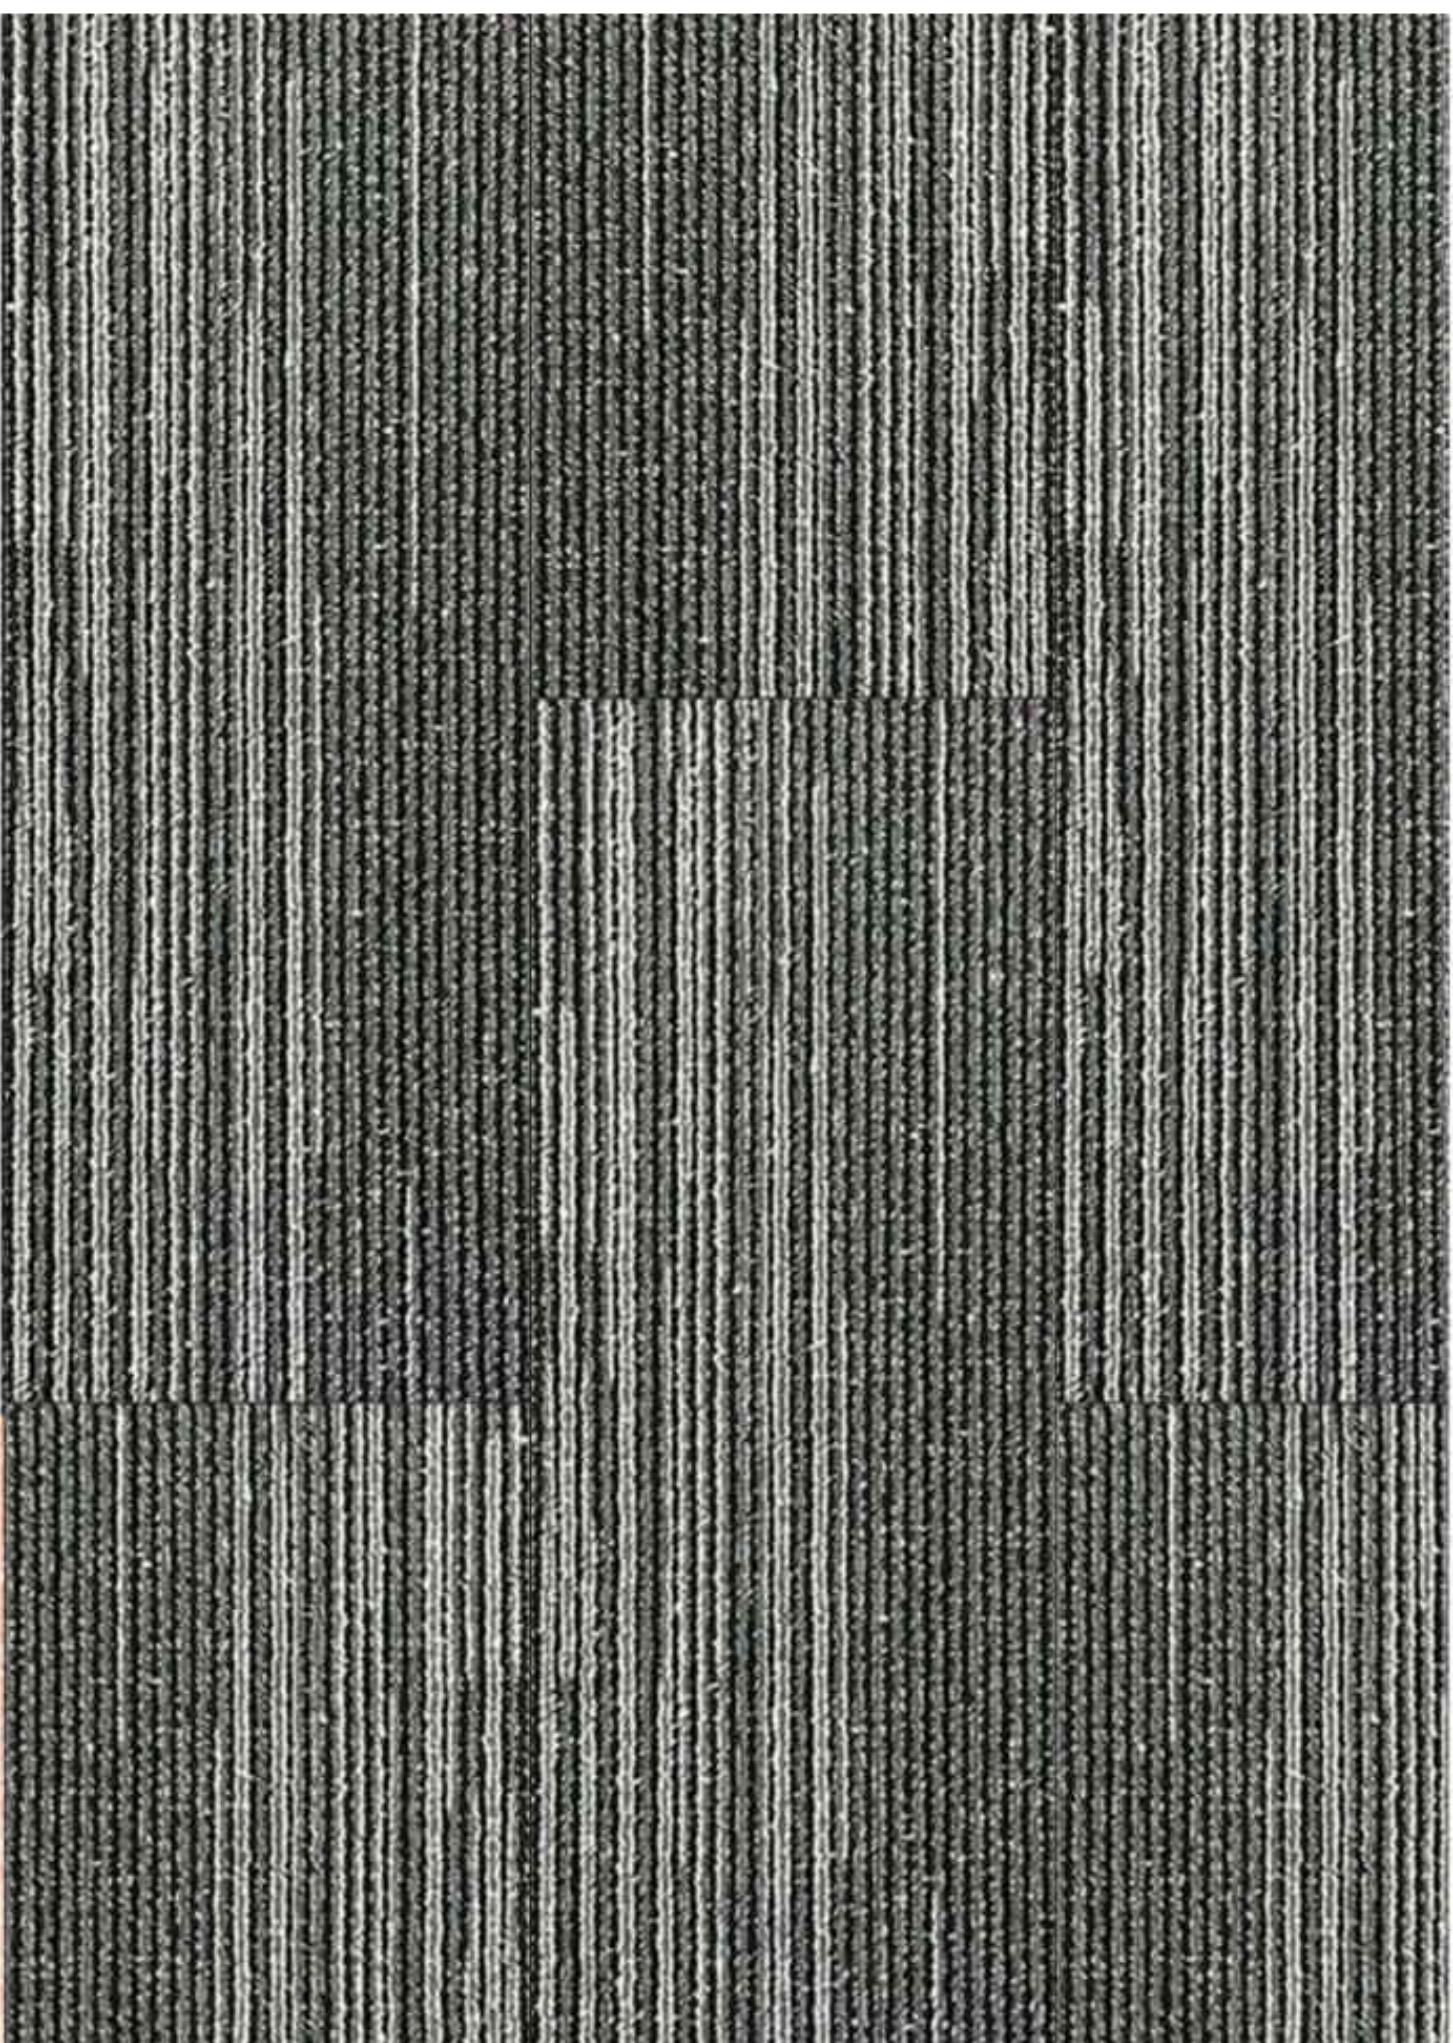


WASHINGTON PLANKS - PEARL GREY

10"x40" - 2.75sqft

BLOQS

PREMIUM OFFICE
FLOORINGS

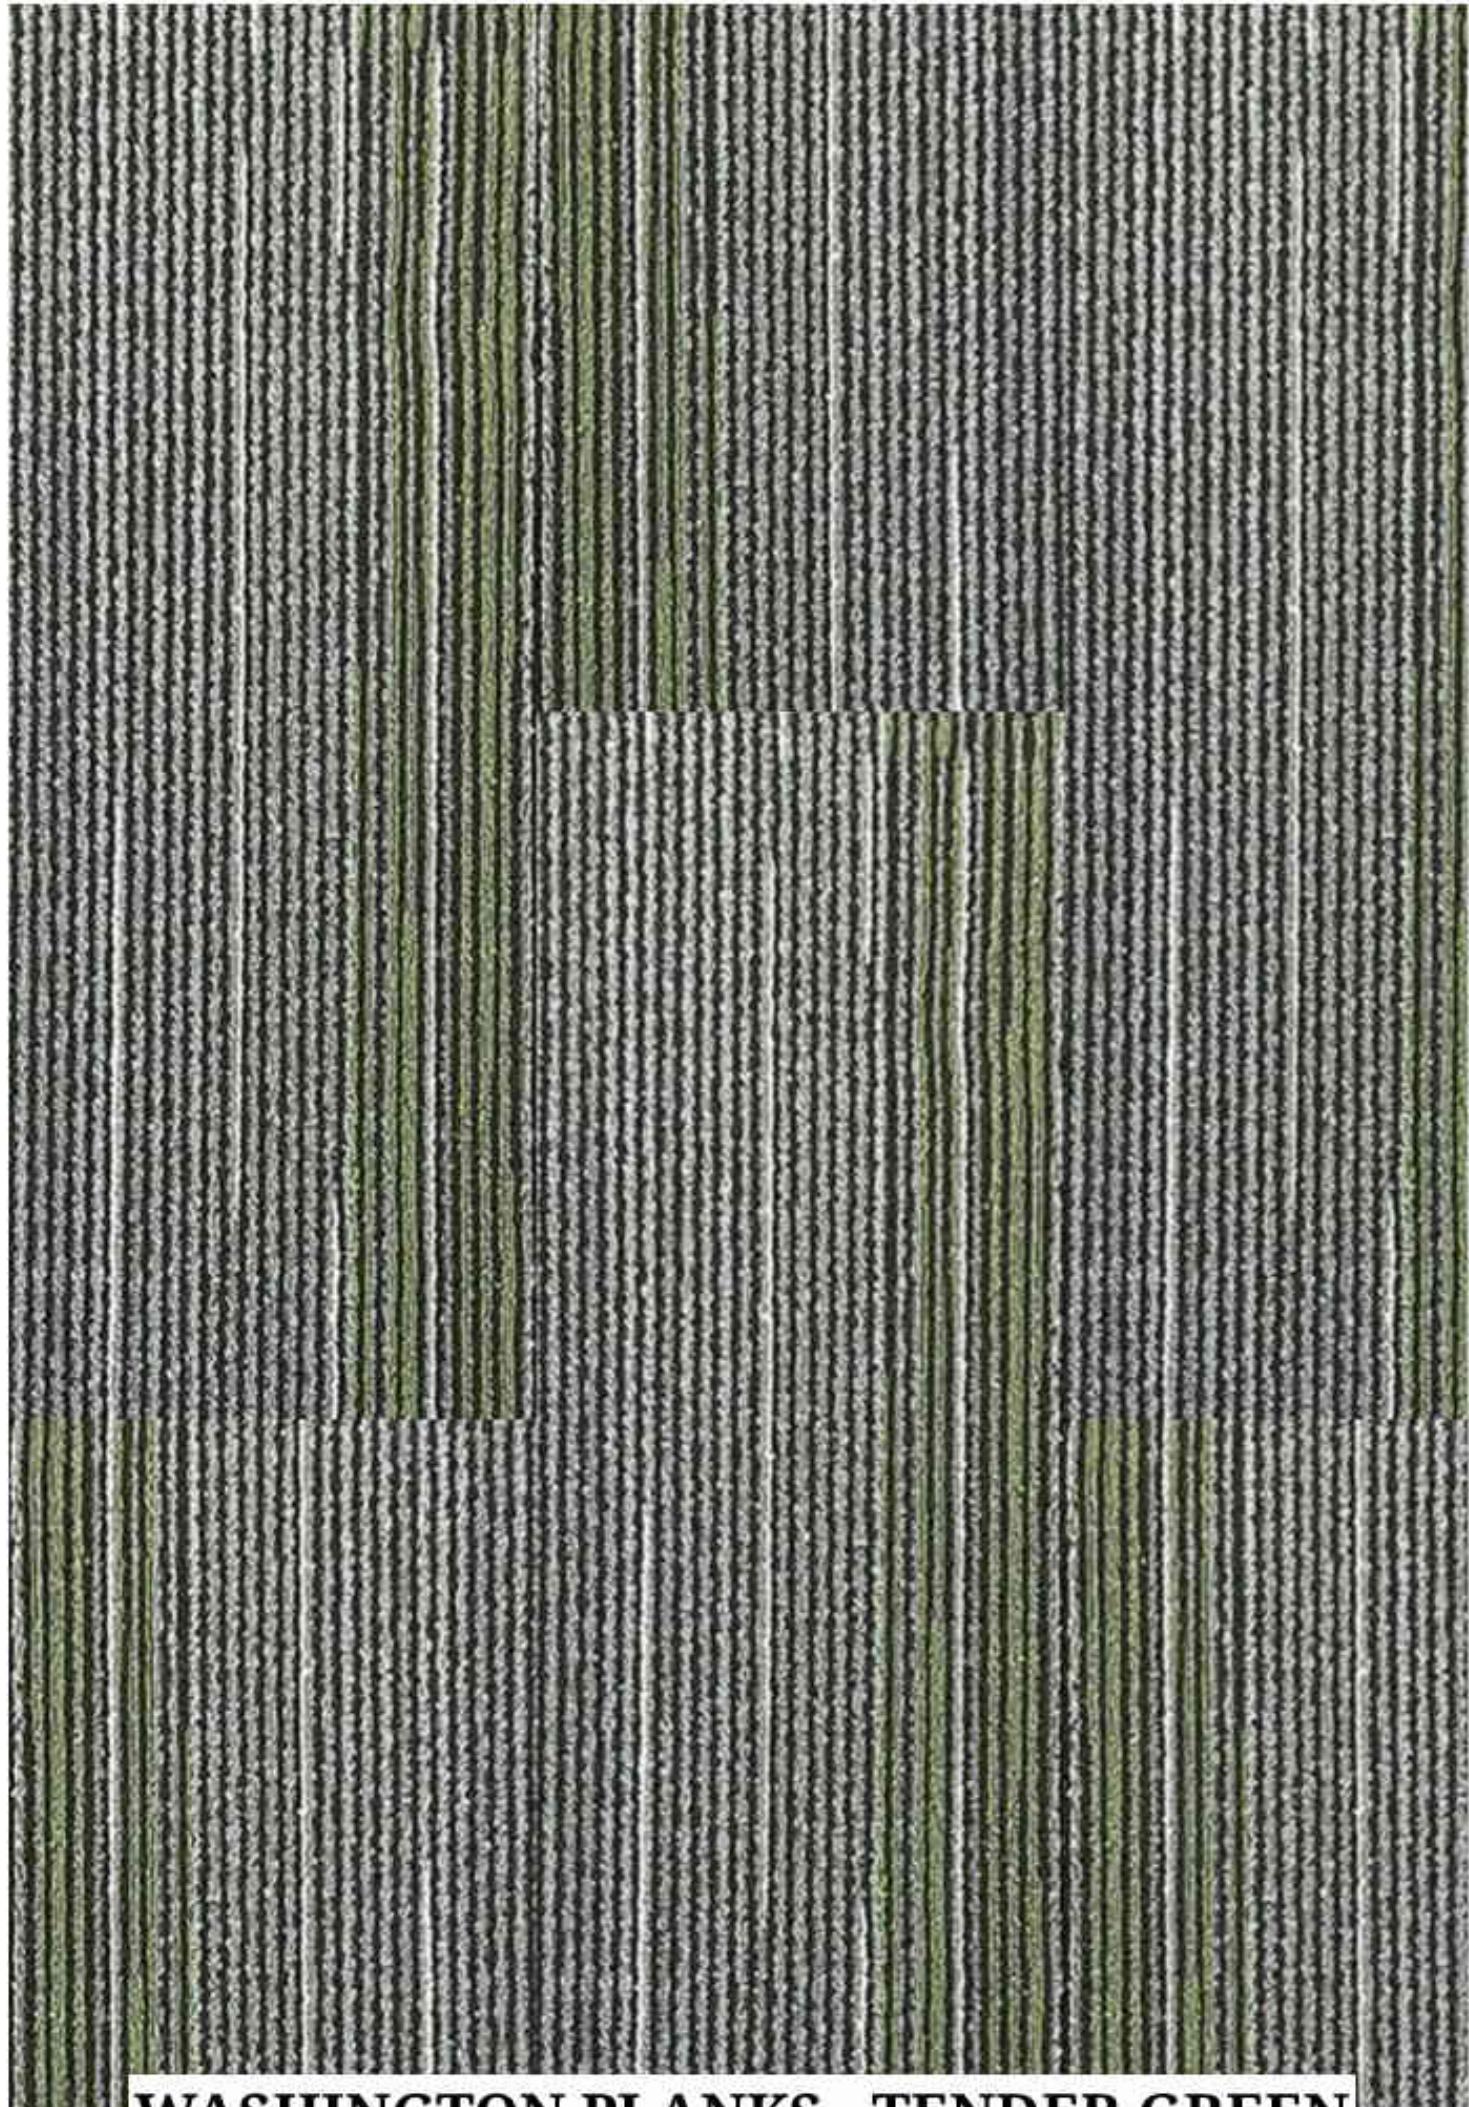


WASHINGTON PLANKS - TENDER GREEN

10"x40" - 2.75sqft

BLOQS

PREMIUM OFFICE
FLOORINGS

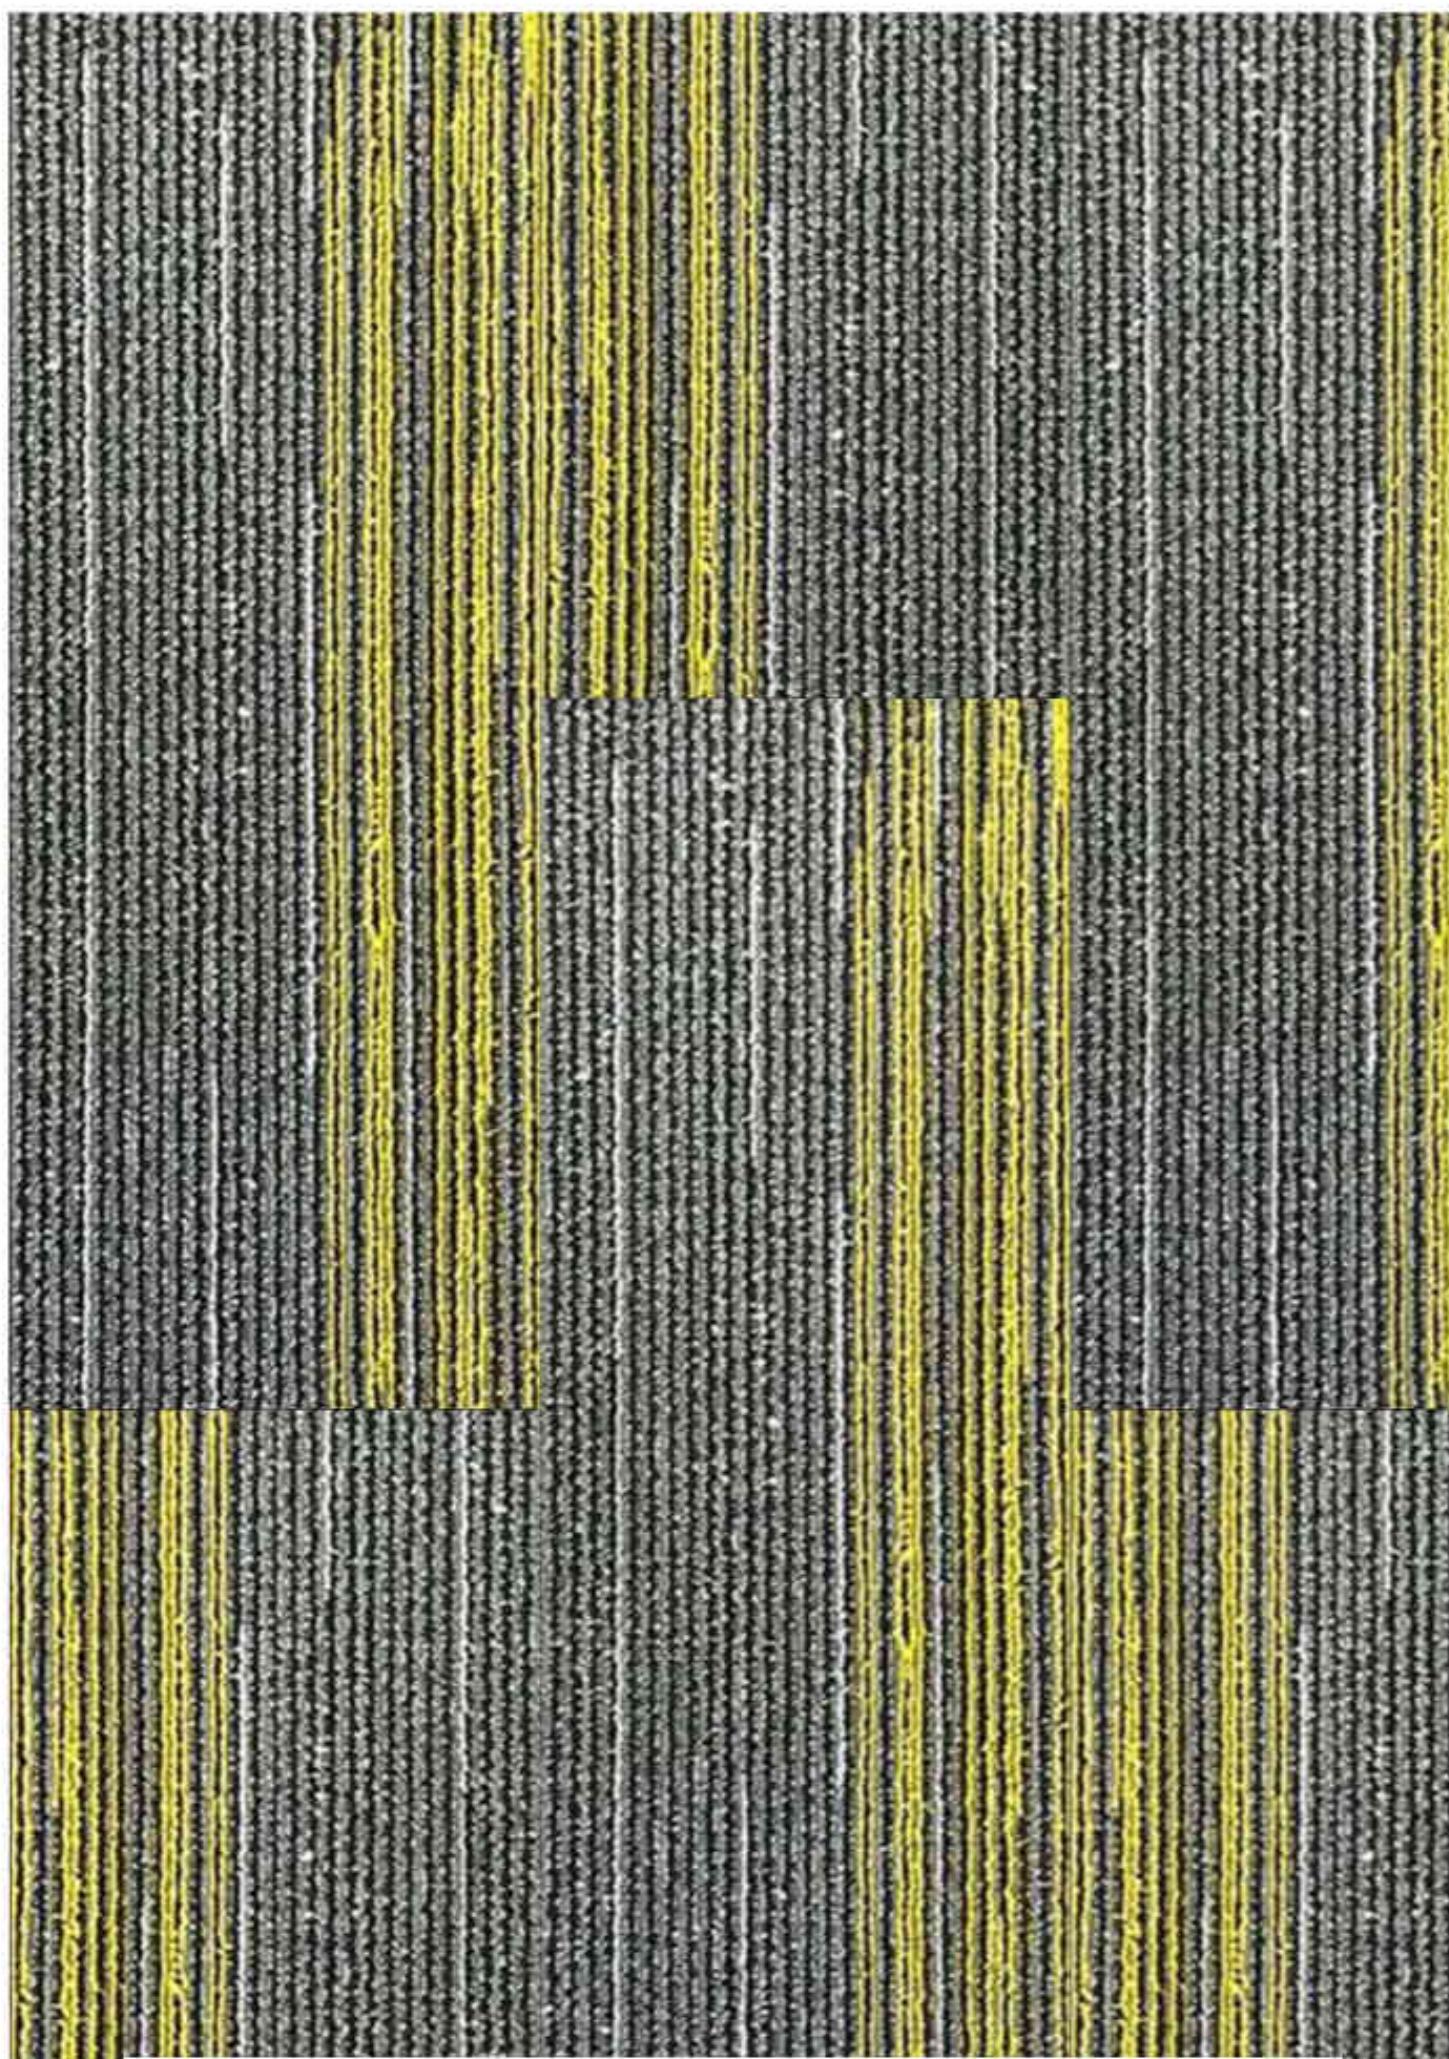

WASHINGTON PLANKS - SUNSHINE

10"x40" - 2.75sqft

BLOQS

PREMIUM OFFICE
FLOORINGS

WASHINGTON PLANKS - SAFFRON

10"x40" - 2.75sqft

BLOQS

PREMIUM OFFICE
FLOORINGS



WASHINGTON PLANKS - CORAL RED



PREMIUM OFFICE
FLOORINGS



10"x40" - 2.75sqft

BLOQS

PREMIUM OFFICE
FLOORINGS



ALGERIA PLANKS - CHESTNUT BROWN

10"x40" - 2.75sqft

BLOQS

PREMIUM OFFICE
FLOORINGS

ALGERIA PLANKS - DENIM BLUE

10"x40" - 2.75sqft

BLOQS PREMIUM OFFICE
FLOORINGS

ALGERIA PLANKS - LIGHT GREY

10"x40" - 2.75sqft

BLOQS

PREMIUM OFFICE
FLOORINGS

ALGERIA PLANKS - DARK GREY



PREMIUM OFFICE FLOORINGS


QUALITY ASSURANCES

Product specifications are derived from averages resulting from normal manufacturing tolerances in yarn, fiber, temperature, humidity and color. May vary within normal industry tolerances. Performance is not affected by such variances.


As in all quality carpet tiles, colors are subject to dye lot variation. Shading is a result of tile direction. This is an inherent characteristics & therefore does not constitute a manufacturing defect. Backing or other materials may be changed without prior notice when shortages occur or when technological advancements provide for improvement of product performance.

INSTALLATION


(Recommended)



✓ Quarter Turn



✗ Monolithic



✗ Brick



PREMIUM OFFICE FLOORINGS

TECHNICAL SPECIFICATIONS

Construction	Multilevel Loop Pile
Yarn Type	100% BCF Polypropylene
Dye Method	Solution Dye
Machine Gauge	1/12th
Tufted Pile weight ($\pm 5\%$)	600 GSM
Total Thickness ($\pm 5\%$)	07 mm
Total Weight ($\pm 5\%$)	4000 gsm
Backing Type	Bitumen + Felt
Tile Size(CM)	25 cm \times 100 cm
Tiles Per Box	24 pcs
Area Per Box	06 sqm 65 sqft



Sound
Insulation



Heat
Insulation



Anti
Static



Color
Fast



Wear-
Proof



Anti
Flammability



PVC Free